

Nasiff CardioCard®

PC BASED RESTING DUAL ECG SYSTEM

Finally... peace of mind!

Affordable

**EMR
Connectivity**

**CONVENIENT
Portable**

**Built-in Networking
Simple**



We have a better solution...

CardioResting™ Dual Connectivity ECG — we care about you and your patients

Nasiff Associates, Inc. is the **FIRST** and continues to take the lead in PC based ECG Systems.

A true 12- lead interpretive ECG with the ability to perform tests using USB, Bluetooth or BLE technology from the same device. Your testing doesn't need to be interrupted, you can continue testing using the same device no matter what your conditions are. Performing fast testing and managing them easily with you at the point-of-care.

- **USB** performs ECG tests on Windows PC/laptops and devices with USB ports. MAC PC/laptops with Parallels, Boot Camp... **Bluetooth** performs tests on Windows PC/laptops, MAC PC/laptops (with Parallels, Boot Camp...) and Android mobile devices. **BLE** performs ECG tests on Apple iPhone, iPad and Android mobile devices
- Cardio Universal EMR Interface™ - pdf, bidirectional Dicom, bidirectional HL7 and all standard interfaces...
- Cardio Patient Data Management™ System
- Built-In Networking and an unlimited patient database
- Mobile, portable, reliable, user-friendly, compact and durable devices
- Feature rich at the best price with legendary quality, excellent customer support and training
- Advanced security features with password options
- Made in USA
- FDA Clearance since 1990




Nasiff Associates, Inc.
leading patient care

Nasiff CardioCard®

PC BASED RESTING DUAL ECG SYSTEM

SPECIFICATIONS

CONNECTION WITH PC	USB and Wireless connection
POWER SUPPLY	USB DC 5v or two AA batteries
POWER CONSUMPTION	< 200mA from USB or batteries
COMPARISONS	ECG/EKG serial historical comparisons
ECG MEASUREMENT RESOLUTIONS	2-4 msec, 1.22uV at 10mm/mV gain
HEART RATE RANGE	30-300bpm
LEADS	Standard 12- lead
LEAD LEAKAGE	< 10uA
ACQUISITION MODE	Simultaneous interpretive 12- lead acquisition
SAMPLING RATE	12- lead sampling rate 250-1000Hz
A/D RATE	1kHz
TIME BASE	12.5, 25 and 50 mm/sec
DYNAMIC RANGE	± 5 mV
FREQUENCY RESPONSE	0.05 to 150 Hz (<i>higher available</i>)
GAINS	2.5, 5, 10, 10/5, 20, 40 mm/mV
INPUT IMPEDANCE	>10 ¹² ohms
SYSTEM NOISE	<40 uV RTI
ECG INTERPRETATION CLASSES	MIs, blocks, enlargements, axis and AFib
FILTERS	AC, baseline, muscle artifact
CMRR	>120 dB
NETWORKING	Built-in
MEASUREMENTS	HR with global measurements, complete interval values and ST information
DIMENSIONS	2.75" W x 1.25" D x 4.87" H (6.985 cm x 3.175 cm x 12.364 cm)
WEIGHT	0.26 lb (0.12 kg)
PC REQUIREMENTS	Tablet/Laptop/Desktop PC, i5 Intel Processor, 8 GB RAM, 256+ GB HD, USB Ports WINDOWS XP through WINDOWS 7, 8, 11 and MAC's with Boot Camp, Dual Boot, VMware Fusion or Parallels
WARRANTY	Two-year manufacturer's warranty on device and software. Free support and training

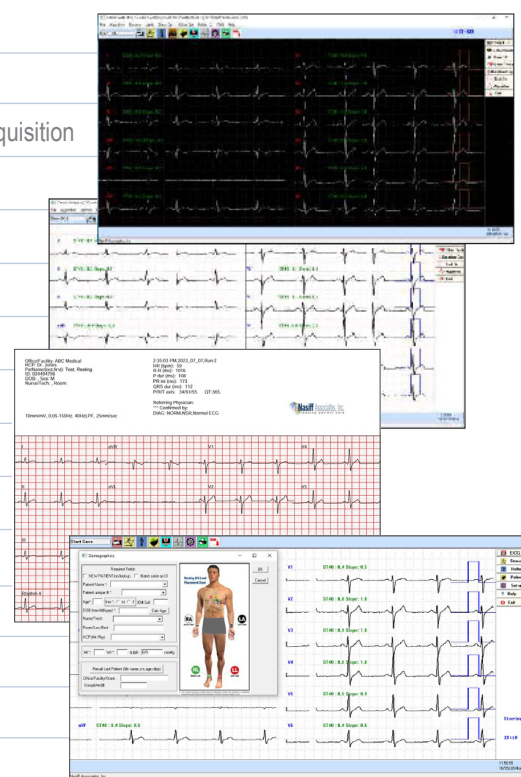

ORDERING INFORMATION CardioResting Dual System — CC-ECG1 DBT

CPT CODE 93000 (additional codes: 93005; 93010)

FOR MORE INFORMATION CONTACT:

Nasiff Associates, Inc. 841-1 County Route 37, Central Square, NY 13036
phone: 315.676.2346 • fax: 315.676.4711 • toll-free: 866.NASIFFA (866.627.4332)
tech support: 315.676.2346 • email: sales@nasiff.com • web: www.nasiff.com



USA FDA Clearance since 1989
Veteran Owned
Made in USA

