

Nasiff CardioCard®


PC BASED RESTING WIRELESS ECG SYSTEM

EMR Connectivity

Built-in Networking
Unlimited Database

Wireless Solutions

(Bluetooth or BLE Technology)
Mobile and Portable

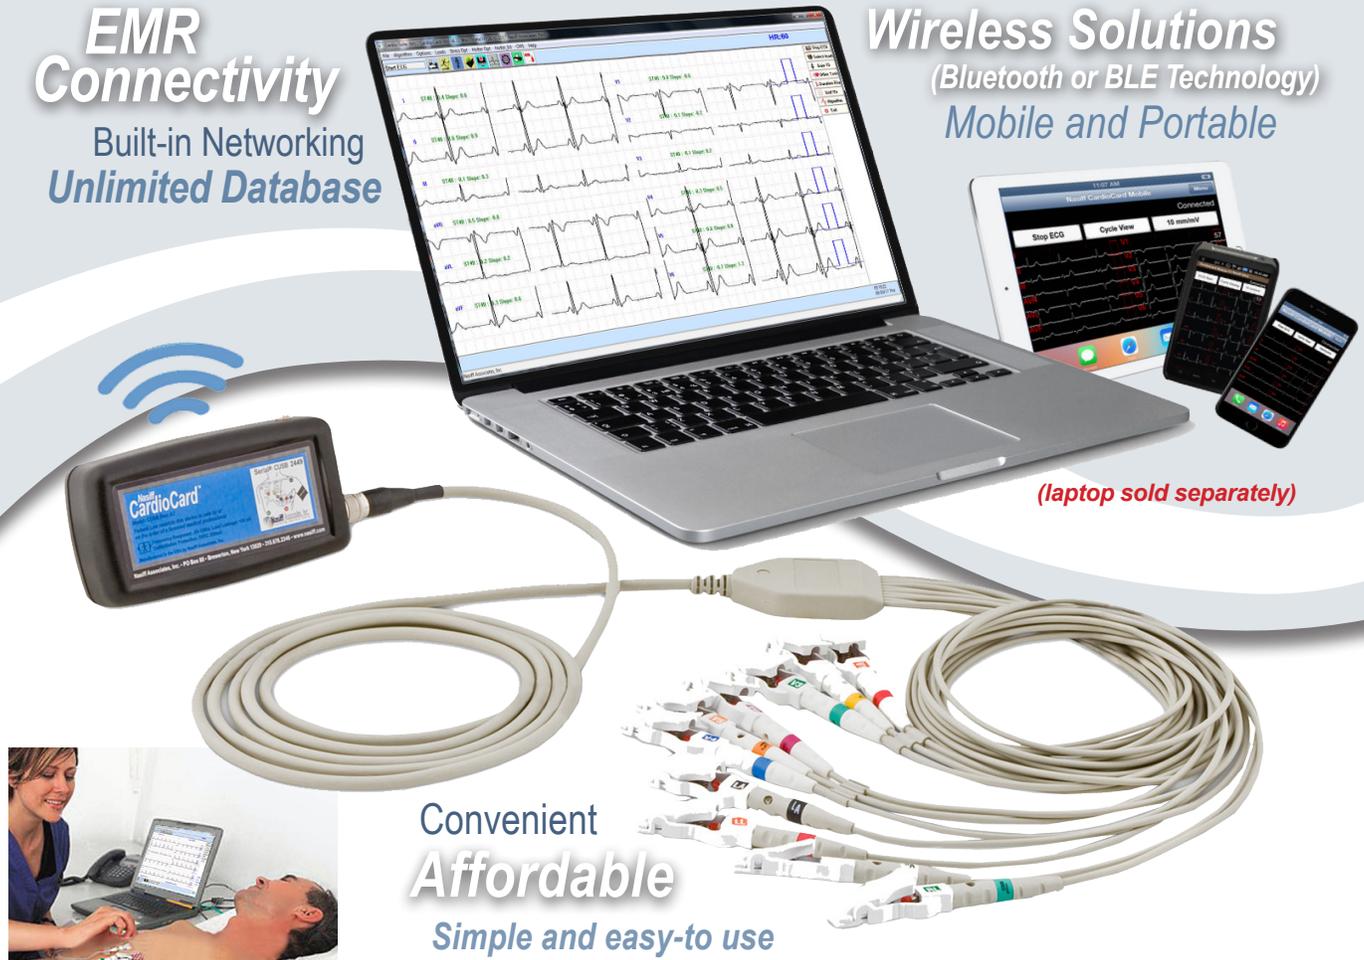

Convenient
Affordable
Simple and easy-to use

CardioResting™ Wireless ECG (including mobile) — we care about you and your patients

Nasiff Associates is the **FIRST** and continues to take the lead in PC based ECG Systems. A true mobile 12-lead interpretive wireless ECG, whether it's Bluetooth or BLE technology. Performing fast testing and managing them easily with you at the point-of-care.

- CardioResting Bluetooth performs ECG tests on Windows PC, laptops and tablets, MAC PC, laptops (with Parallels, Boot Camp...) and Android mobile devices
- CardioResting BLE performs ECG tests on Apple iPhone, iPad and Android mobile devices
- Cardio Universal EMR Interface™ - pdf, bidirectional Dicom, bidirectional HL7 and all standard interfaces...
- Cardio Patient Data Management™ System
- Built-In Networking
- Unlimited Patient Database
- Legendary quality, excellent customer support and training
- Mobile, portable, reliable, user-friendly, compact and durable devices
- Feature rich at the best price
- Advanced security features with password options
- Made in USA
- FDA Clearance since 1990




Nasiff CardioCard®

PC BASED RESTING WIRELESS ECG SYSTEM

SPECIFICATIONS



CONNECTION	Bluetooth and BLE connection
POWER SUPPLY	Two AA batteries
POWER CONSUMPTION	< 200mA from batteries
COMPARISONS	ECG/EKG serial historical comparisons
ECG MEASUREMENT RESOLUTIONS	2-4 msec, 1.22uV at 10mm/mV gain
HEART RATE RANGE	30-300bpm
LEADS	Standard 12- lead
LEAD LEAKAGE	< 10uA
ACQUISITION MODE	Simultaneous interpretive 12- lead acquisition
SAMPLING RATE	12- lead sampling rate 250-1000Hz
A/D RATE	1kHz
TIME BASE	12.5, 25 and 50 mm/sec
DYNAMIC RANGE	± 5 mV
FREQUENCY RESPONSE	0.05 to 150 Hz (<i>higher available</i>)
GAINS	2.5, 5, 10, 10/5, 20, 40 mm/mV
INPUT IMPEDANCE	>10 ¹² ohms
SYSTEM NOISE	<40 uV RTI
ECG INTERPRETATION CLASSES¹	MIs, blocks, enlargements, axis and AFib
FILTERS¹	AC, baseline, muscle artifact
CMRR	>120 dB
NETWORKING	Built-in
MEASUREMENTS	HR with global measurements, complete interval values and ST information
DIMENSIONS	2.75" W x 1.25" D x 4.87" H (6.985 cm x 3.175 cm x 12.364 cm)
WEIGHT	0.26 lb (0.12 kg)
PC REQUIREMENTS	Tablet/Laptop/Desktop PC, i5 Intel Processor, 8 GB RAM, 256+ GB HD, USB Ports, WINDOWS XP through WINDOWS 11 and MAC's with Boot Camp, Dual Boot, VMware Fusion or Parallels
OS REQUIREMENTS	iOS products, iPads and iPhones. Data access to store and save in CardioCard database
WARRANTY	Two-year manufacturer's warranty on device and software. Free support and training

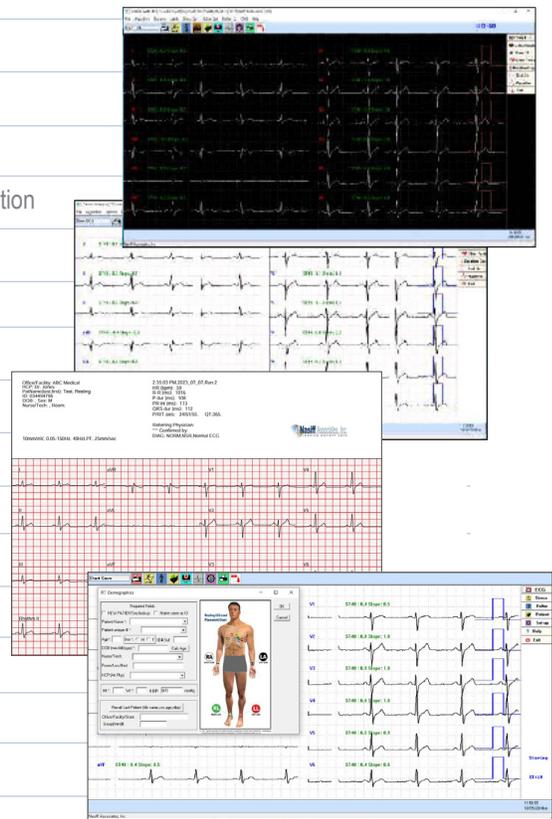

Note 1: when on iOS iPads and iPhones it is performed remotely. On all other operating systems performed on system

ORDERING INFORMATION CardioResting BT System — CC-ECG1 BT
 CardioResting Mobile System — CC-ECG1 BLE

CPT CODE 93000 (additional codes: 93005; 93010)

FOR MORE INFORMATION CONTACT:

Nasiff Associates, Inc. 841-1 County Route 37, Central Square, NY 13036
 phone: 315.676.2346 ▪ fax: 315.676.4711 ▪ toll-free: 866.NASIFFA (866.627.4332)
 tech support: 315.676.2346 ▪ email: sales@nasiff.com ▪ web: www.nasiff.com



USA FDA Clearance since 1989

Veteran Owned
 Made in USA

